

1/32

FIG.1(a)



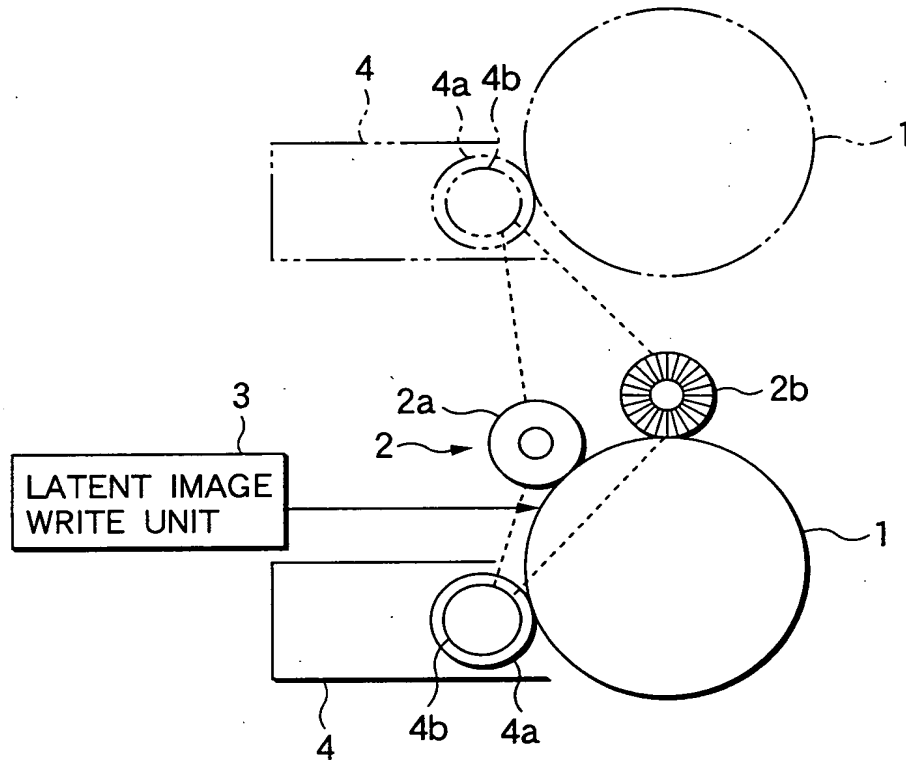


FIG.1(b)

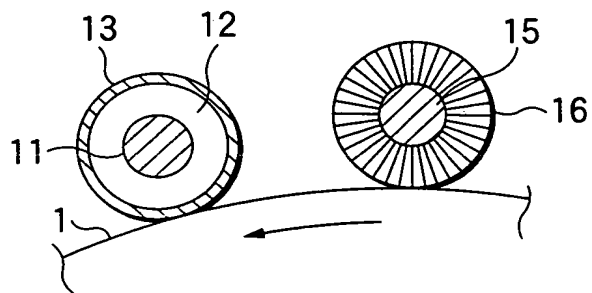


2/32

FIG.2

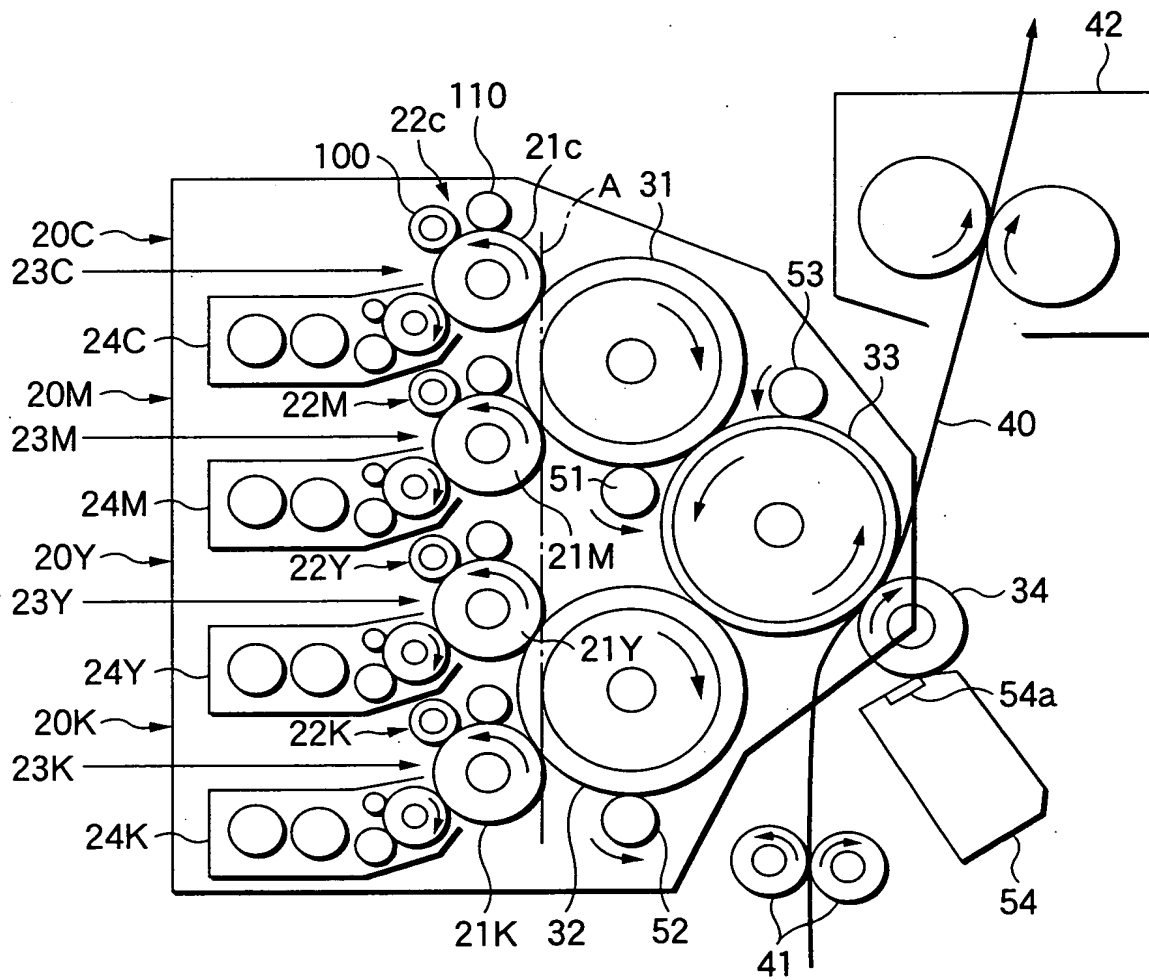


3/32

FIG.3

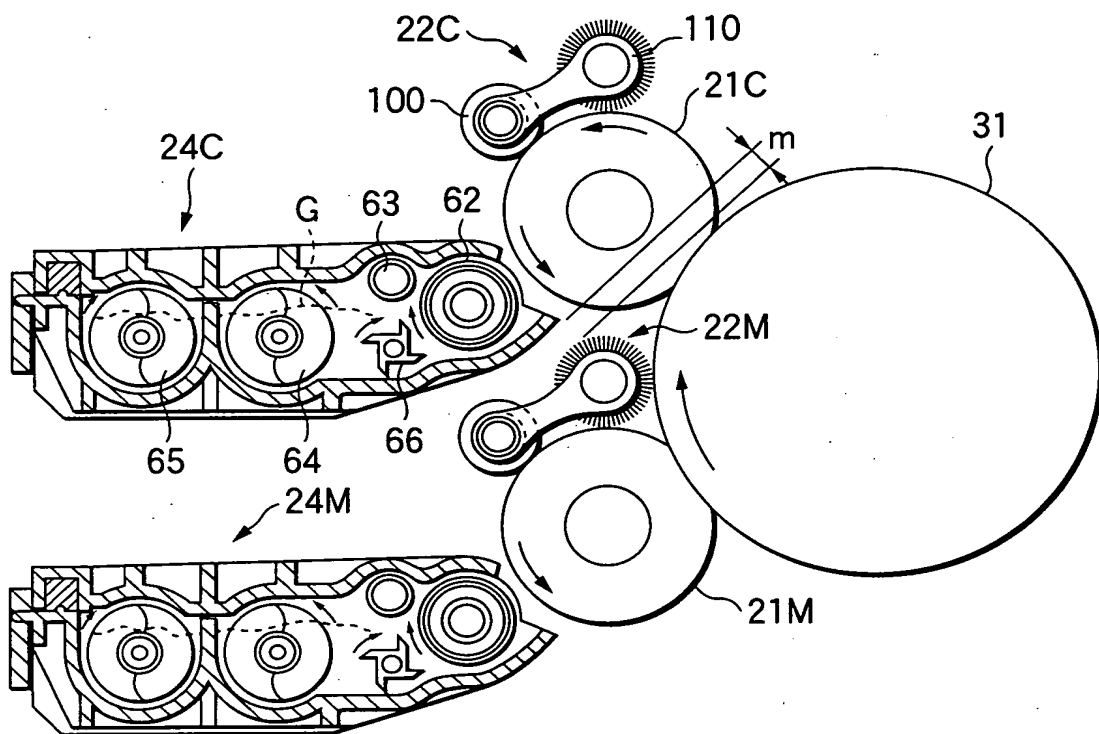

4/32

FIG.4

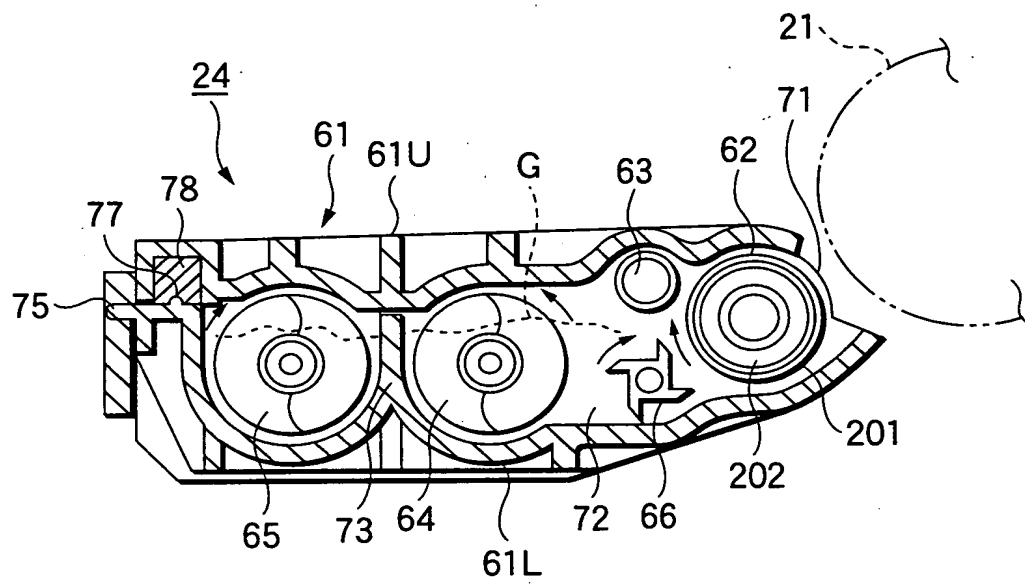

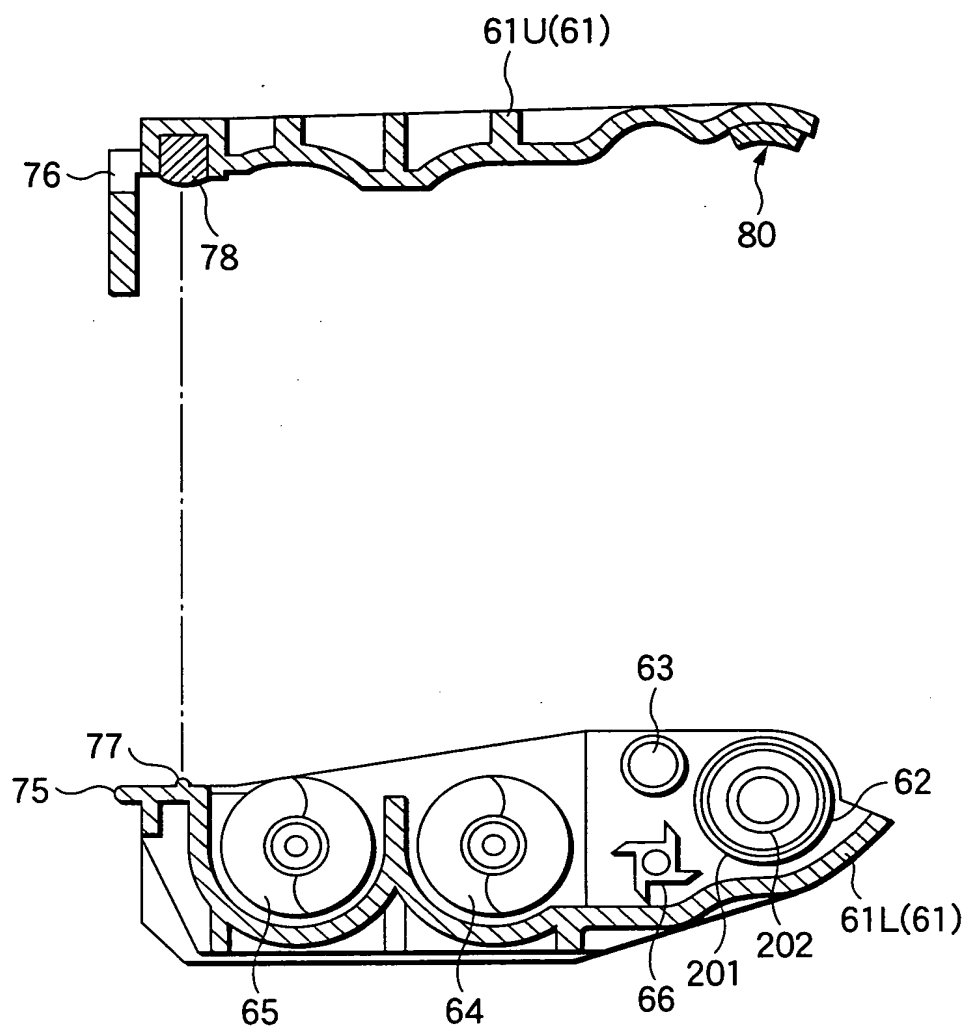


FIG.6


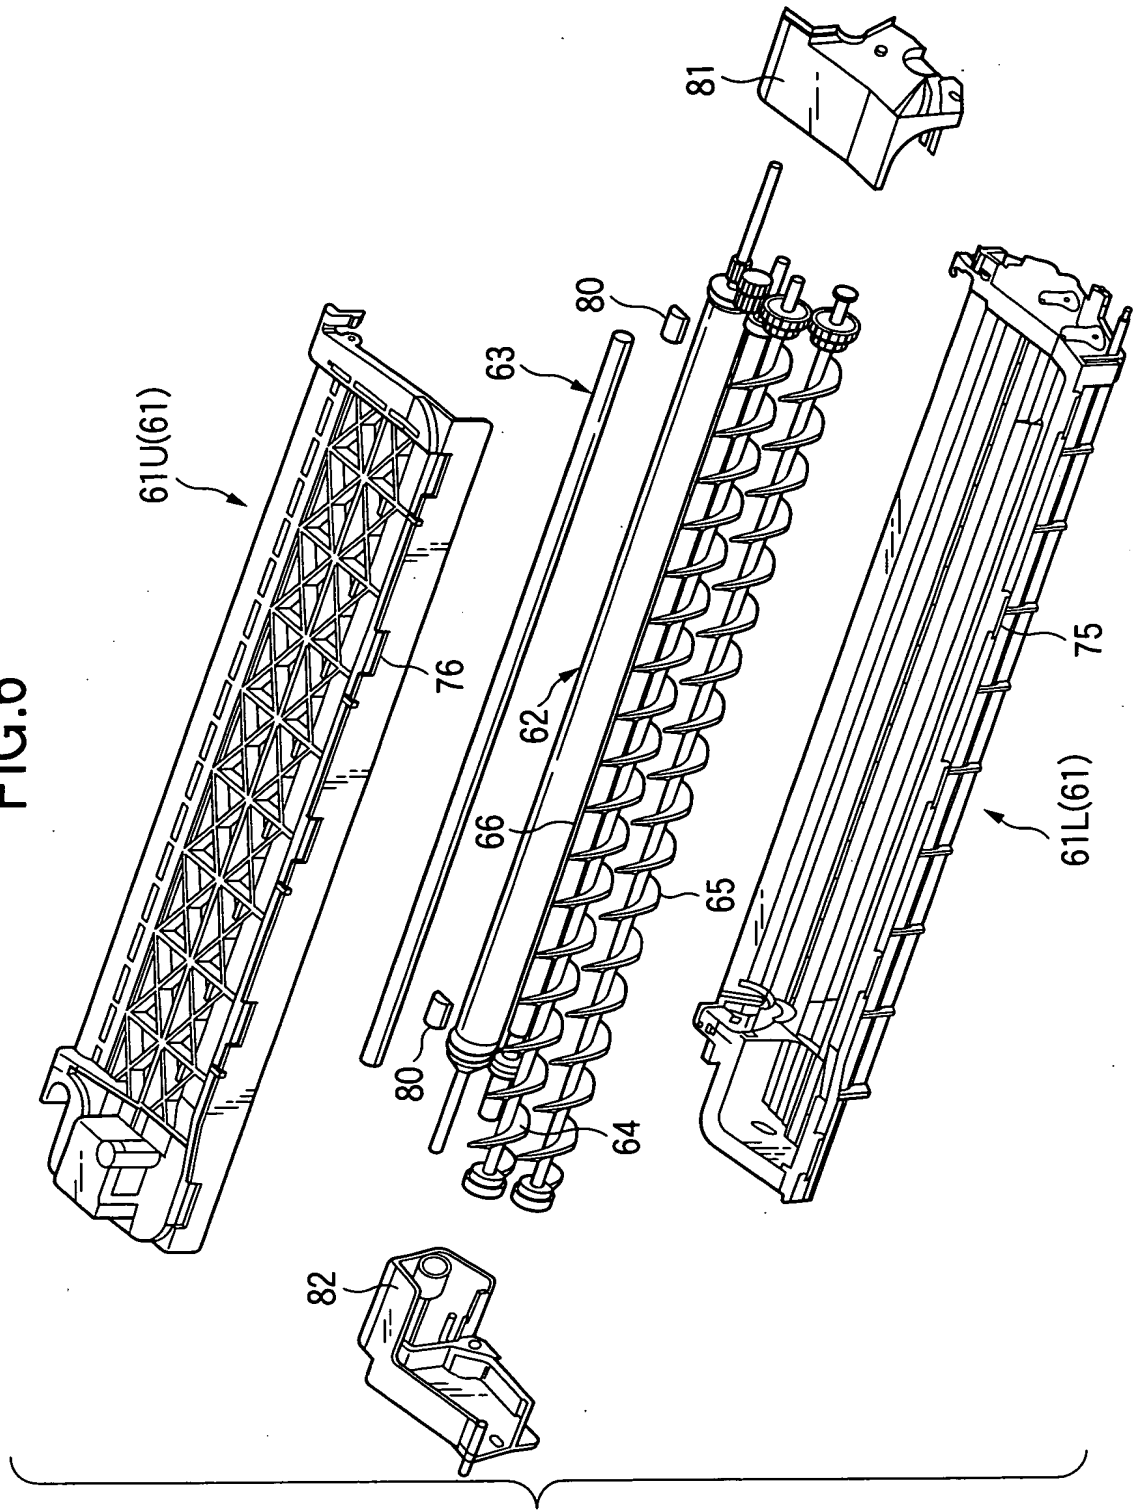


FIG.7

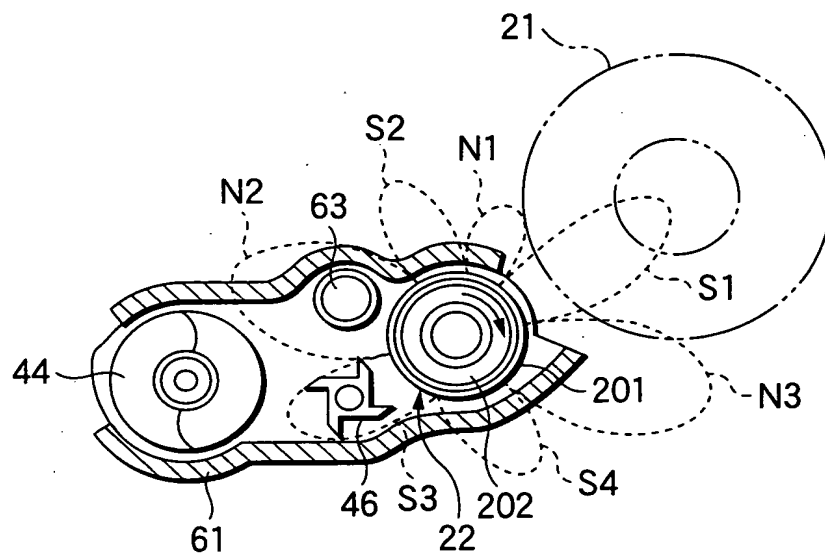

8/32

FIG.8(a)

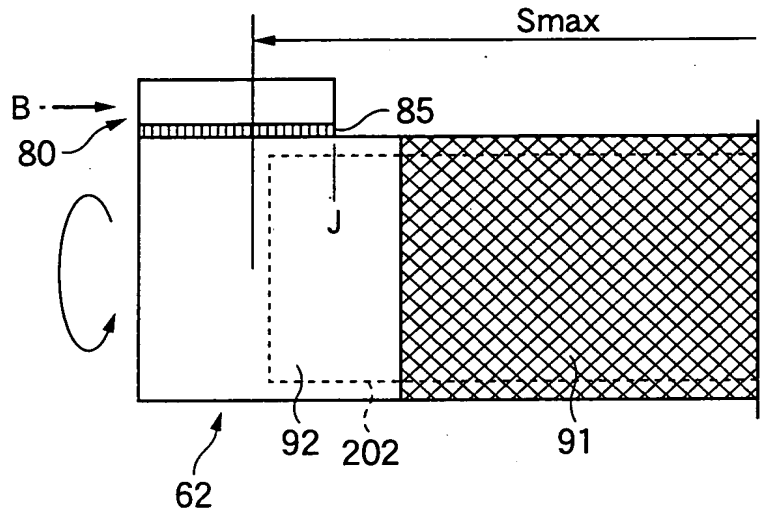


FIG.8(b)




FIG.9(a)




FIG.9(b)





FIG.9(c)





9/32

FIG.10(a)


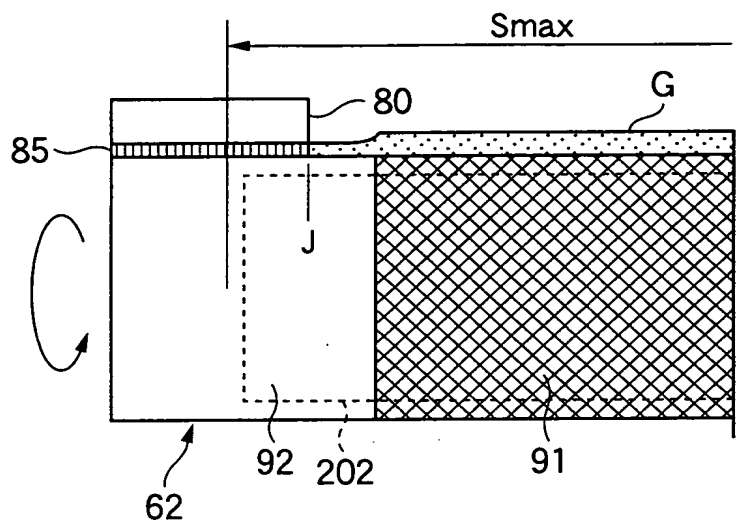
MODEL ACCORDING TO  
FIRST EMBODIMENT

FIG.10(b)

COMPARATIVE MODEL

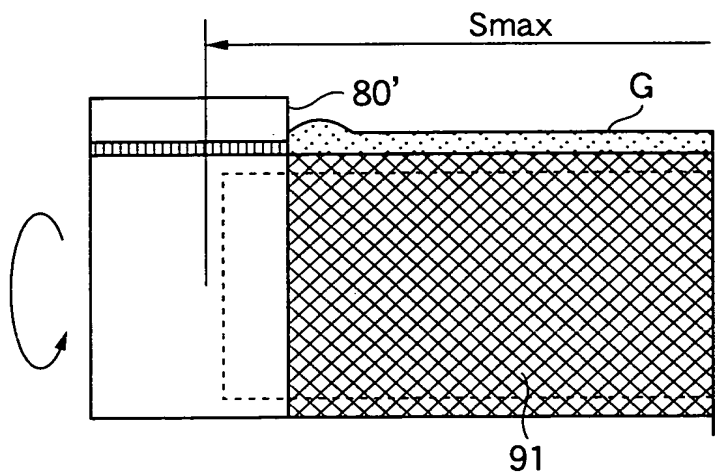

10/32

FIG.11(a)


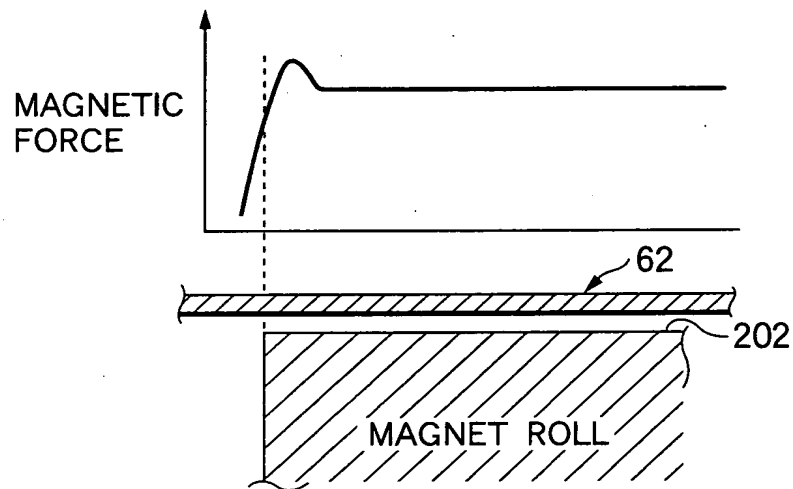


FIG.11(b)

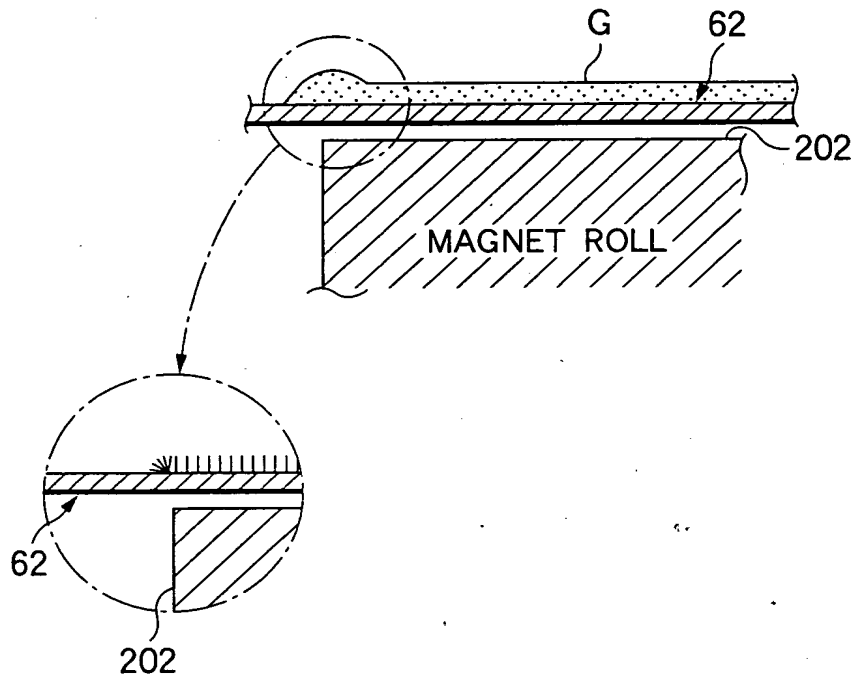

11/32

FIG.12(a)



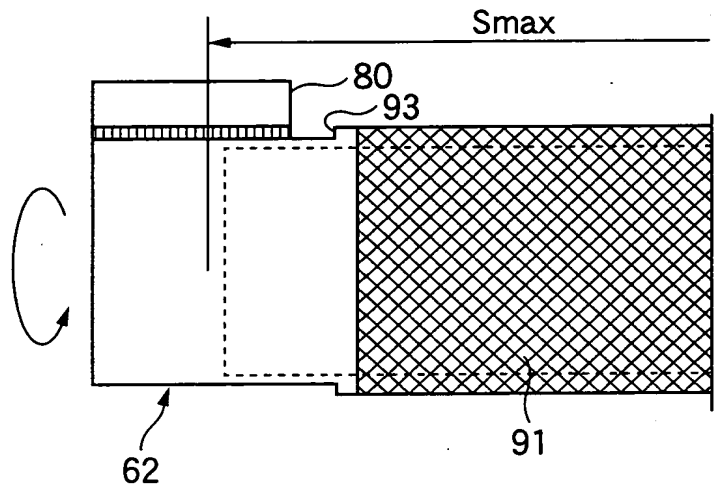


FIG.12(b)

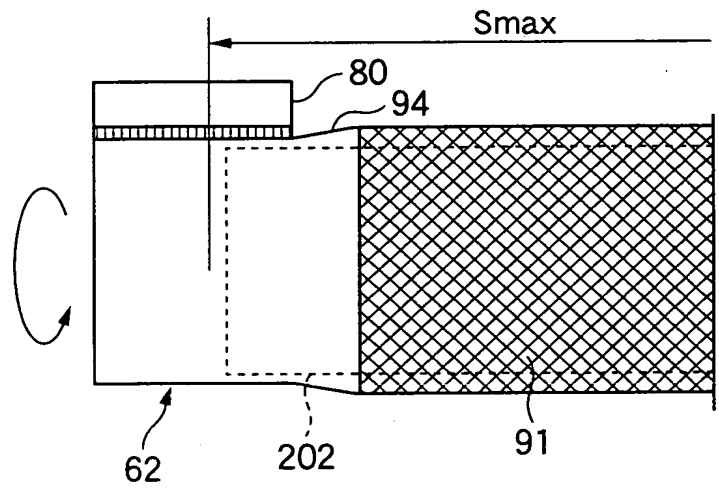

12/32

FIG.13

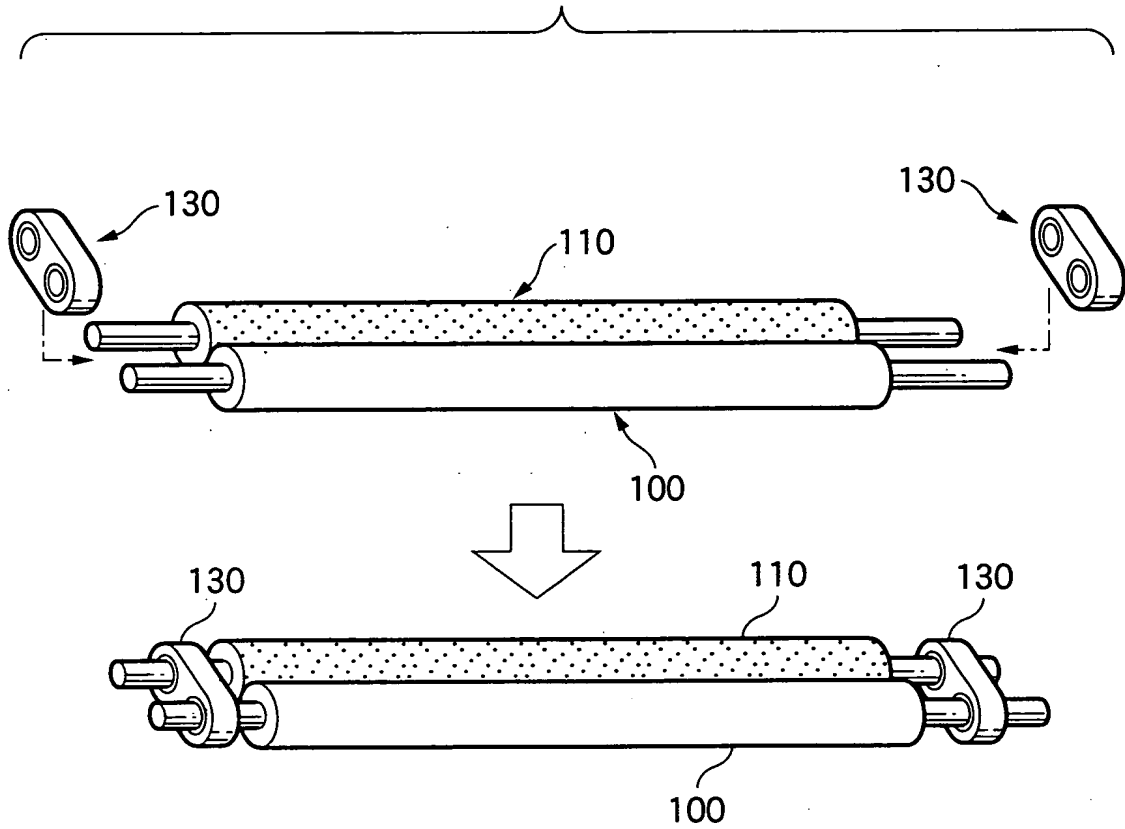

13/32

FIG.14(a)

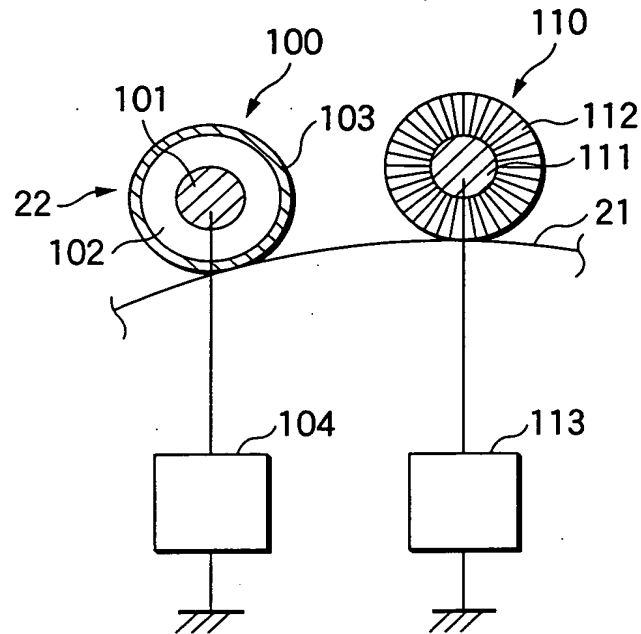


FIG.14(b)

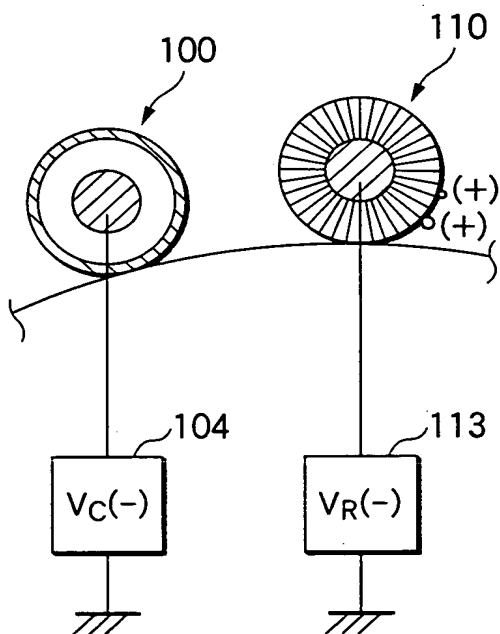


FIG.14(c)

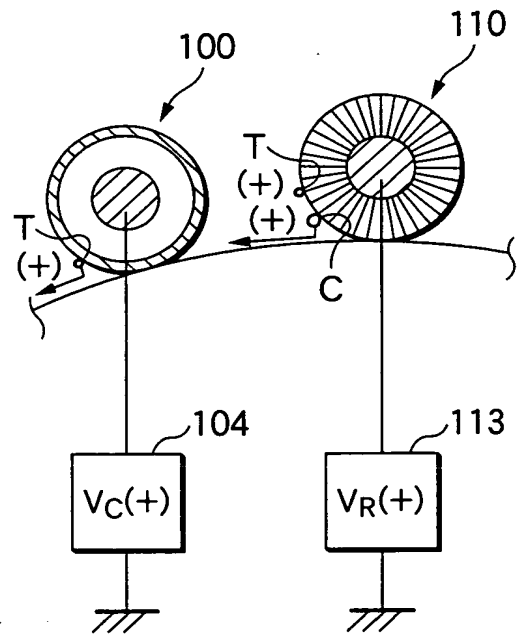


FIG.15(a)

● END PART SPOT CAUSED BY BCO/CARRIER SCATTER

	PAPER END PART POSITION	DISTANCE BETWEEN PAPER END PART AND BLAST END PART		
		3mm	4mm	5mm
DISTANCE BETWEEN THIN LAYER AREA REGULATION POSITION AND BLAST END PART	0mm	○	△	△
	1mm	△	○	○
	2mm	△	○	○

FIG.15(b)

● FOGGING AT UPPER END PART OF PHOTOCONDUCTION DRUM

	PAPER END PART POSITION	DISTANCE BETWEEN PAPER END PART AND BLAST END PART		
		3mm	4mm	5mm
DISTANCE BETWEEN THIN LAYER AREA REGULATION POSITION AND BLAST END PART	0mm	△	△	△
	1mm	△	○	○
	2mm	○	○	○

※SHUT DOWN DURING PRINT, TAPE TRANSFER

FIG.15(c)


● DIRTY LEVEL OF DRIVER GEAR IN PERIPHERY OF DEVELOPING ROLL END PART

	PAPER END PART POSITION	DISTANCE BETWEEN PAPER END PART AND BLAST END PART		
		3mm	4mm	5mm
DISTANCE BETWEEN THIN LAYER AREA REGULATION POSITION AND BLAST END PART	0mm	△	○	○
	1mm	○	○	○
	2mm	○	○	○

15/32

FIG.16


CHARGING SHAFT : SUM  
REFRESHER SHAFT : SUM

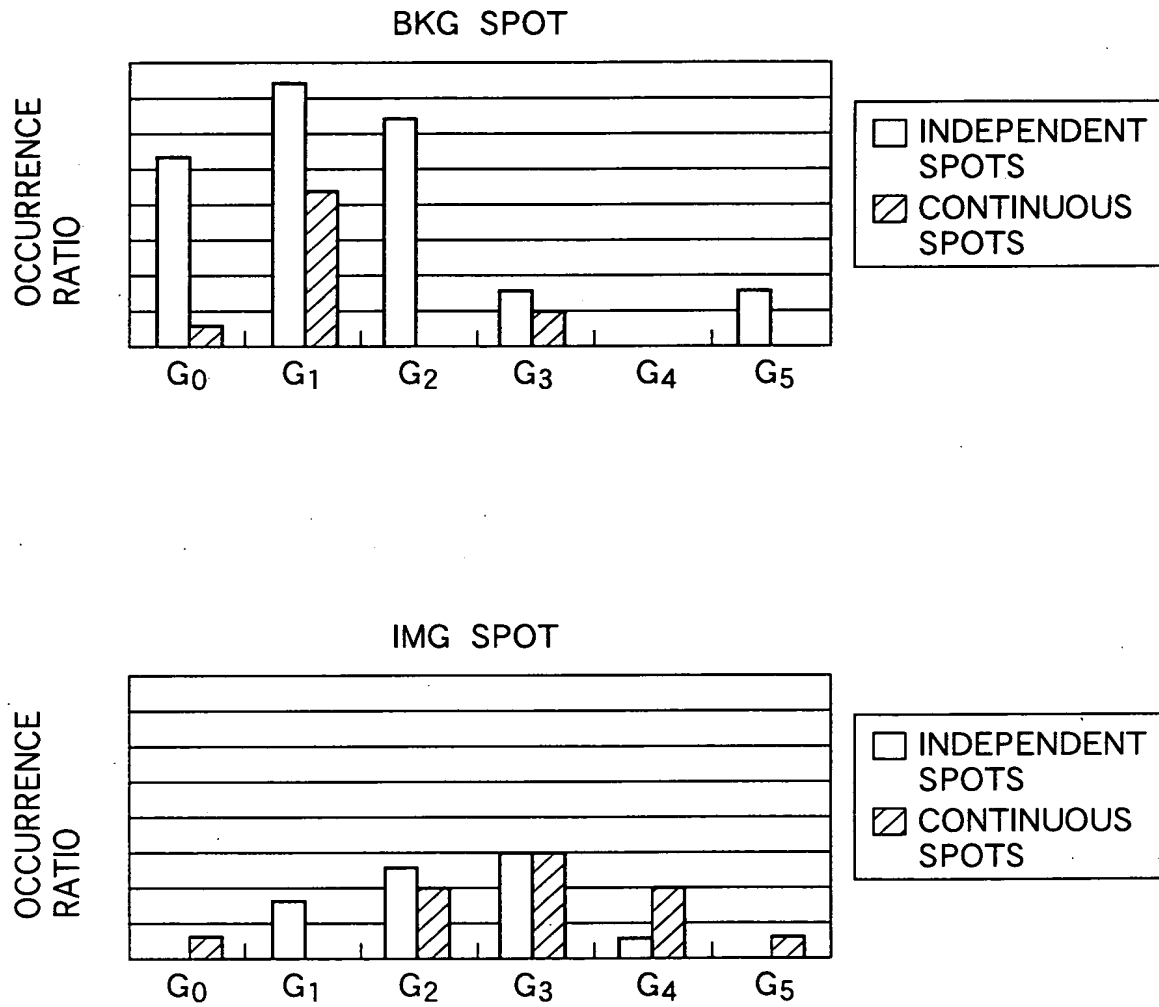

16/32

FIG.17

CHARGING SHAFT : SUS303Cu  
REFRESHER SHAFT : SUM

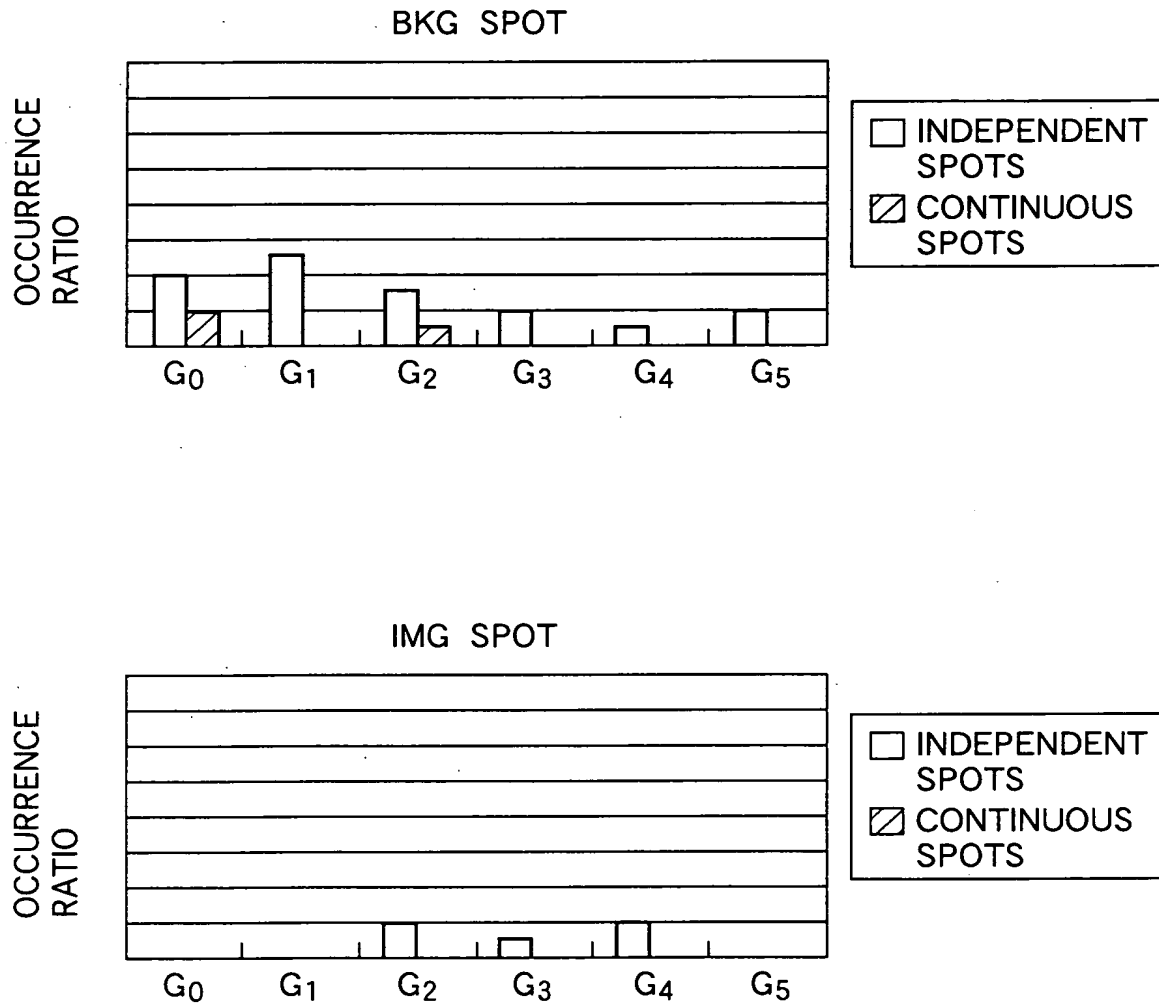




17/32

FIG.18


CHARGING SHAFT : SUS303Cu  
REFRESHER SHAFT : SUS303Cu

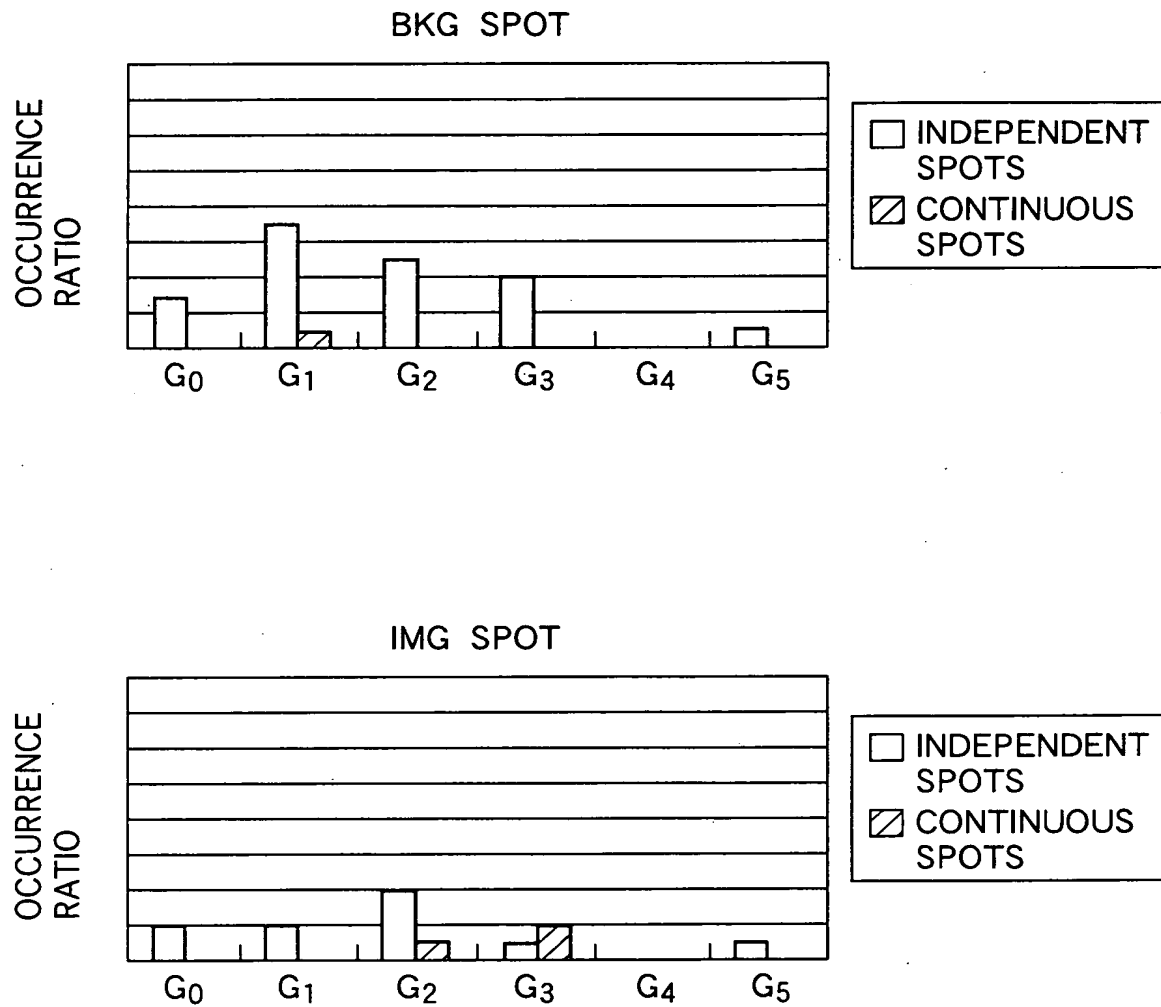

18/32


FIG.19

SPOT CLASIFICATION  
BY PHENOMENON

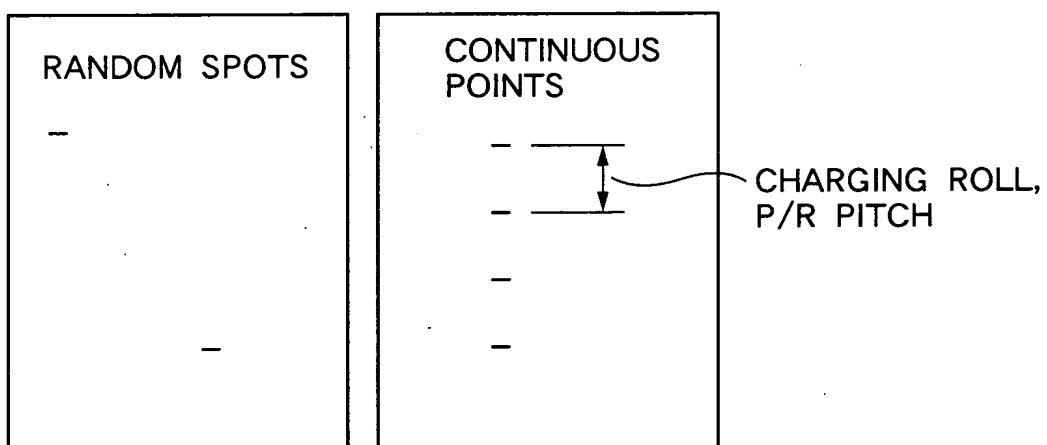

19/32

FIG.20

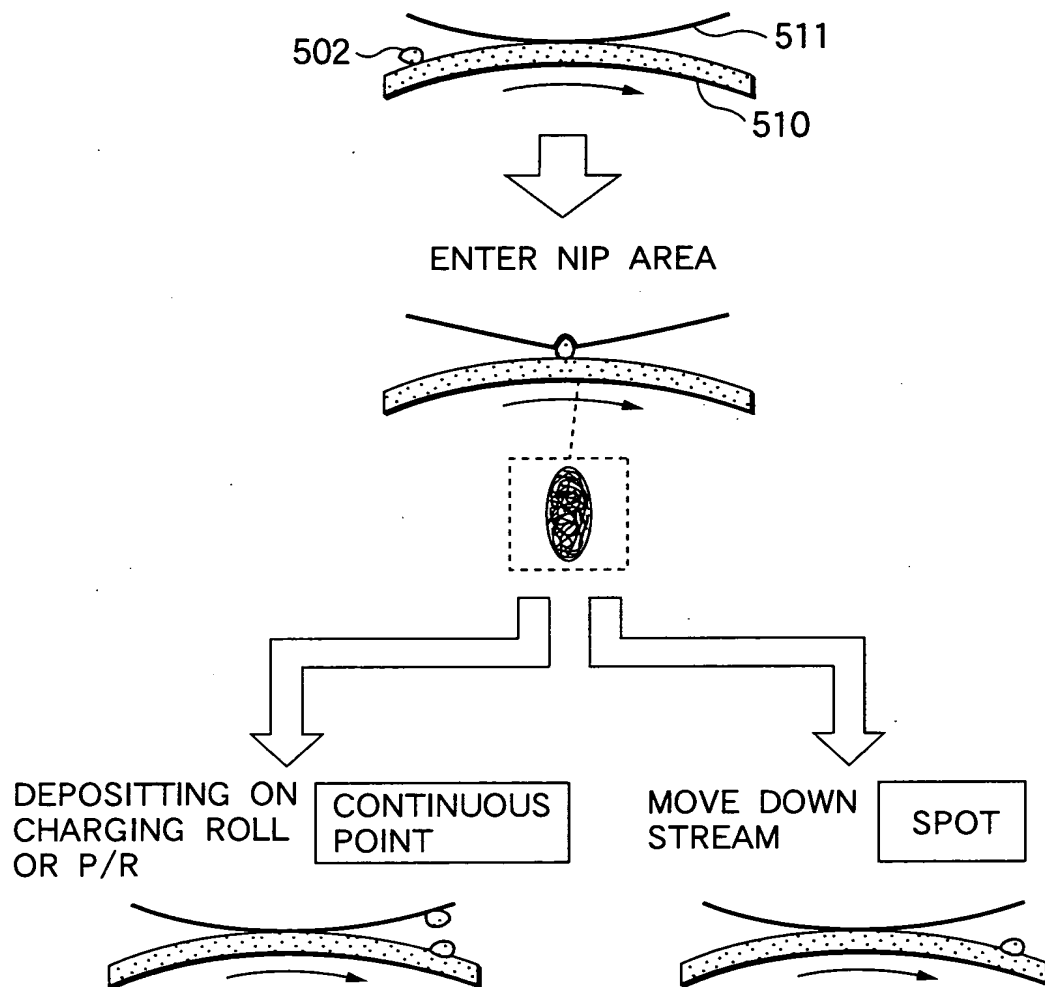

20/32

FIG.21(a)


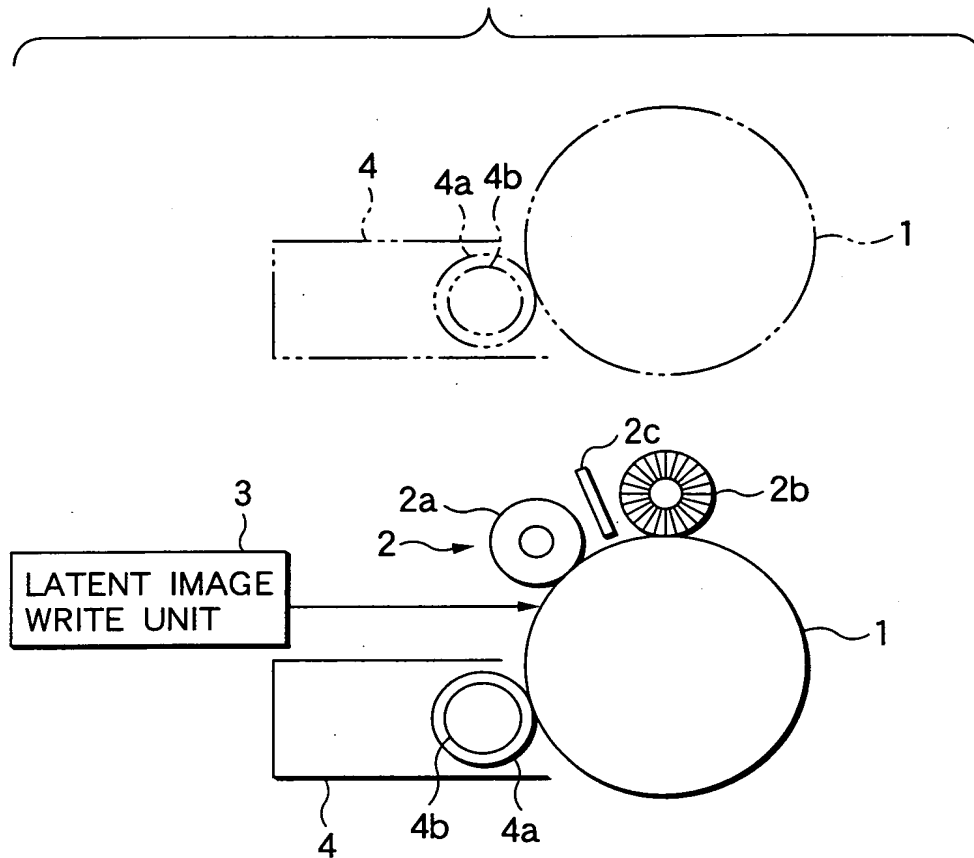


FIG.21(b)

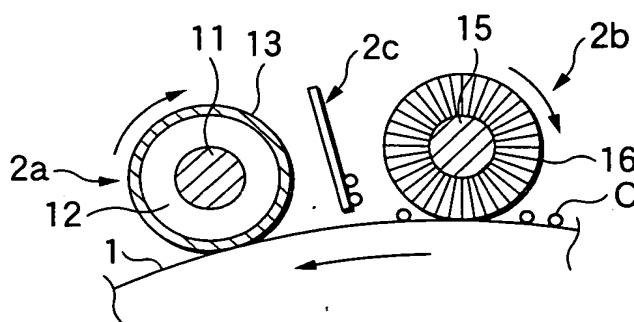

21/32

FIG.22(a)


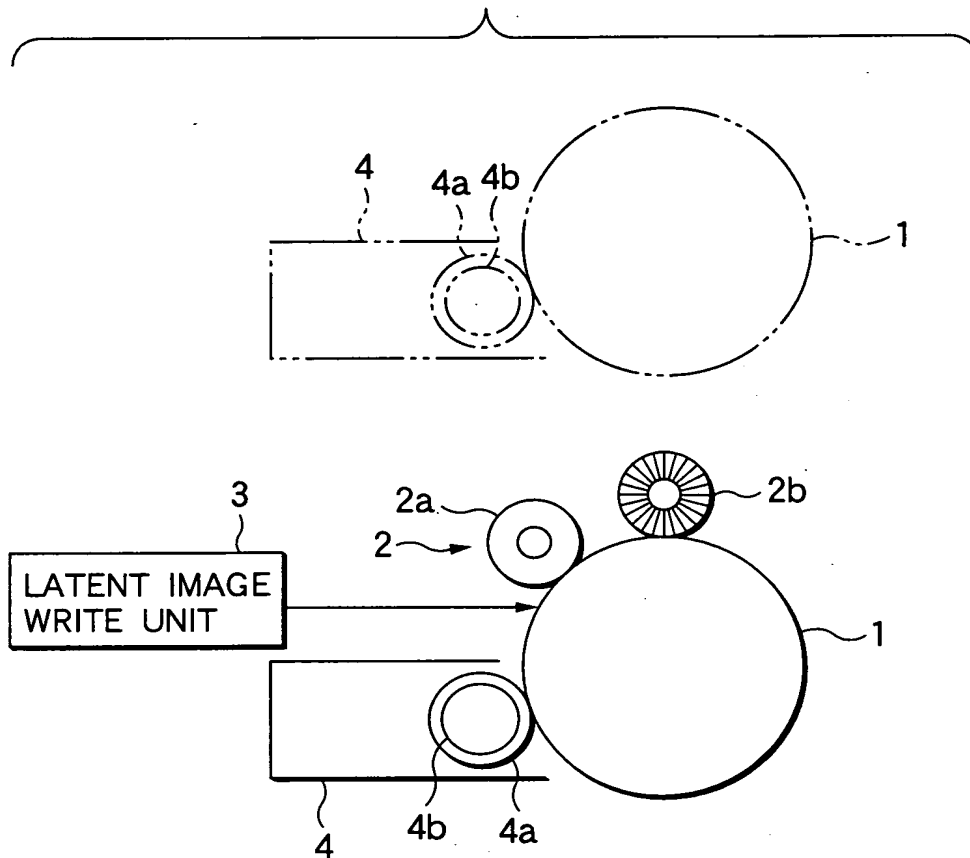


FIG.22(b)

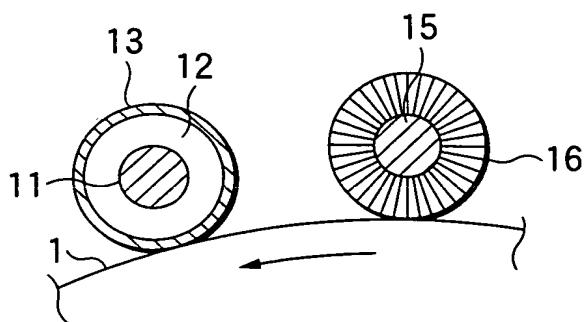

22/32

FIG.23


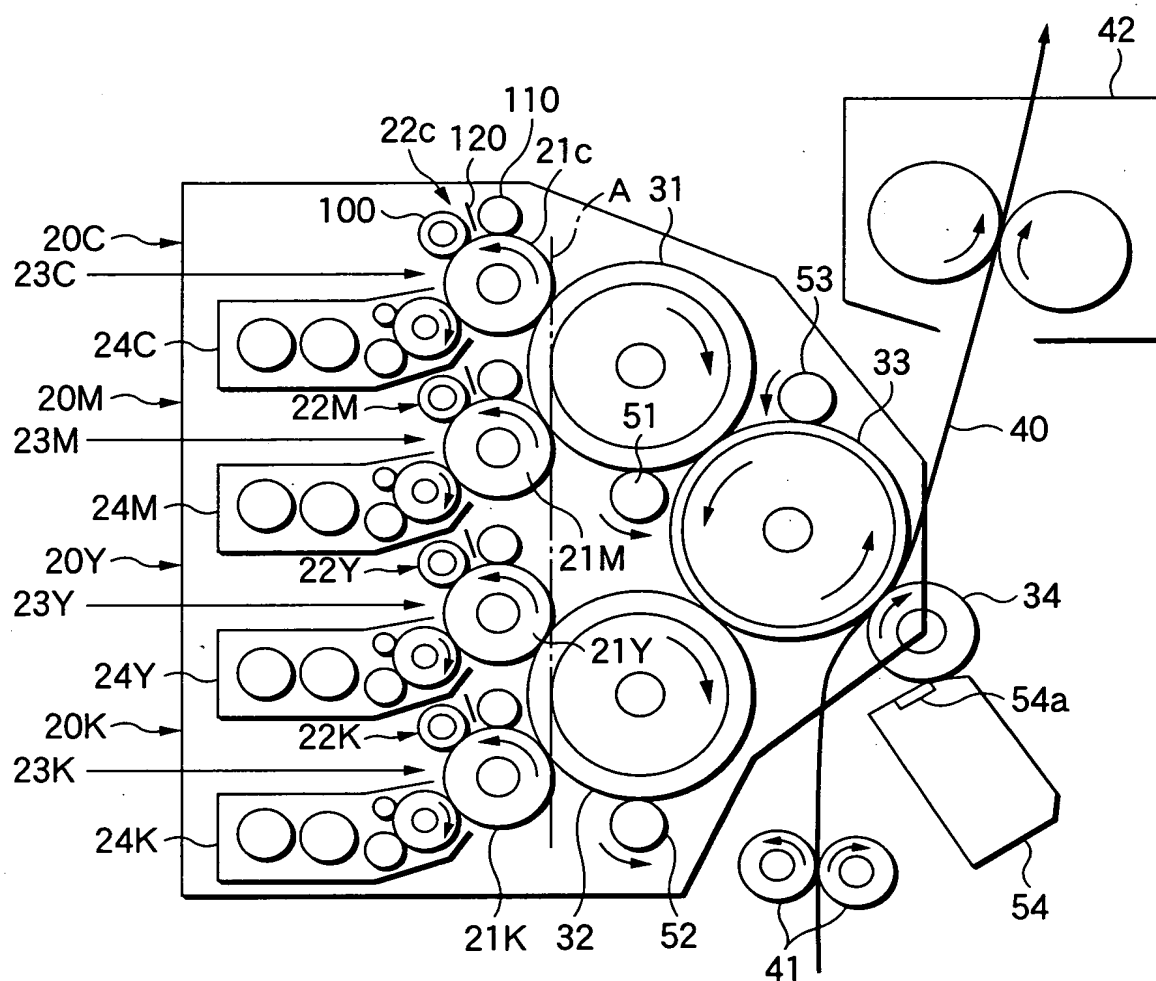


FIG.24

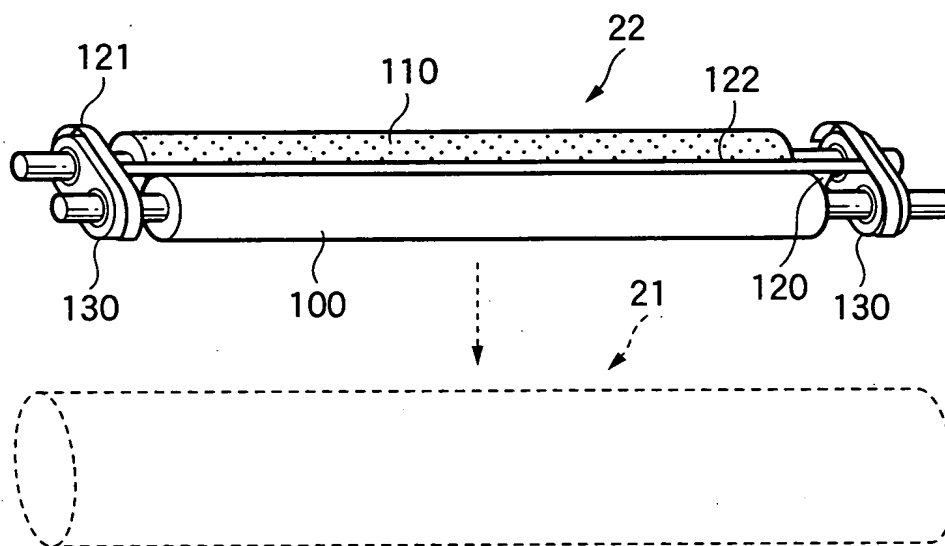

24/32

FIG.25(a)


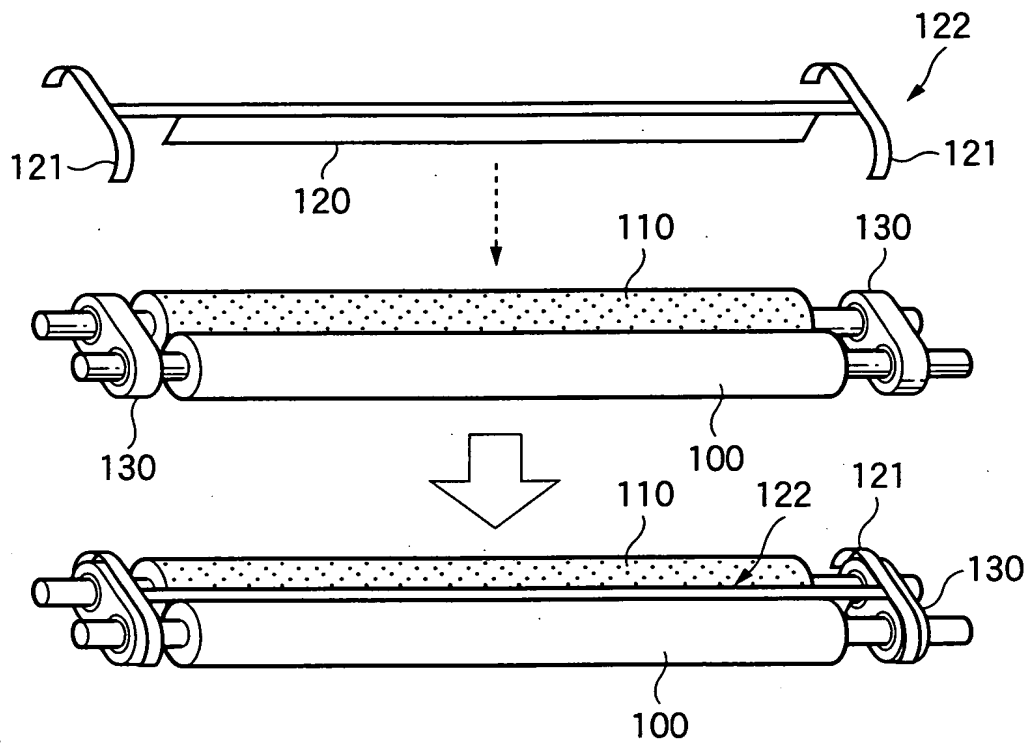


FIG.25(b)



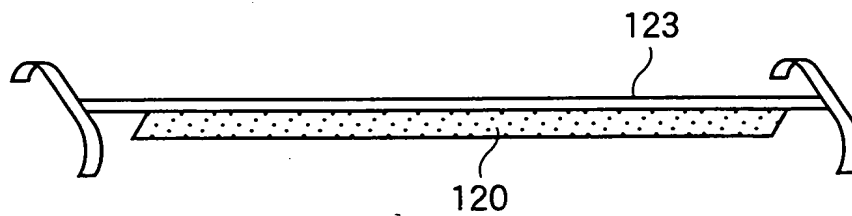

25/32

FIG.26(a)

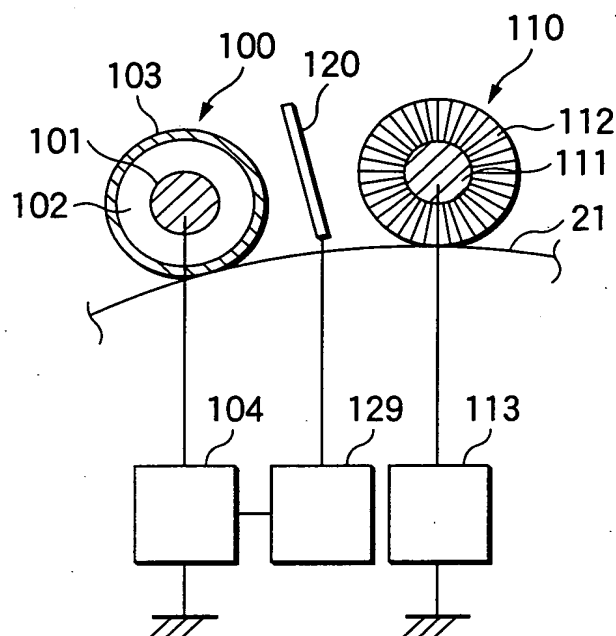


FIG.26(b)


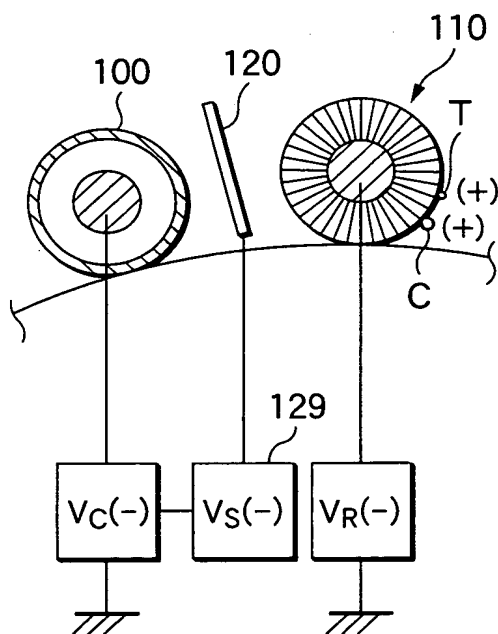


FIG.26(c)

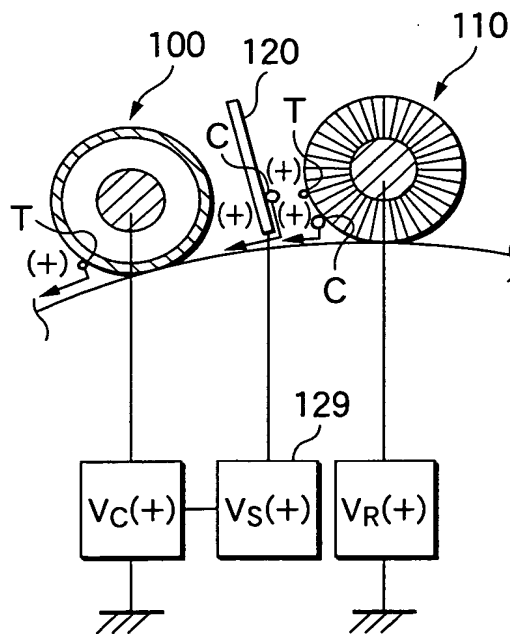

26/32

FIG.27(a)

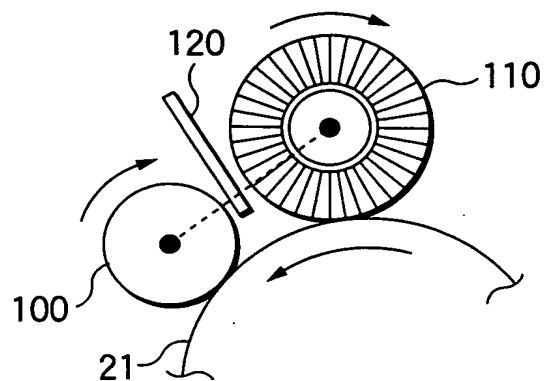


FIG.27(b)


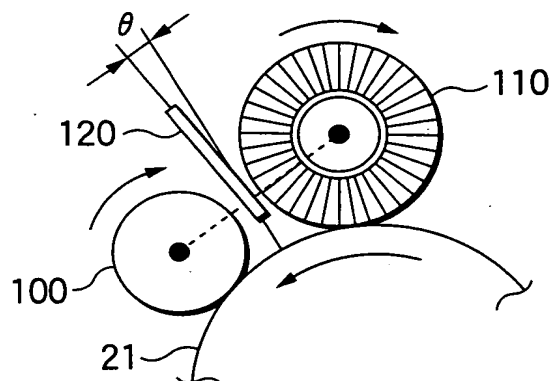


FIG.27(c)

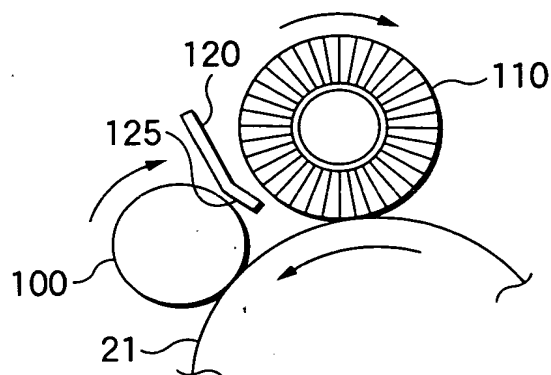

27/32

FIG.28(a)

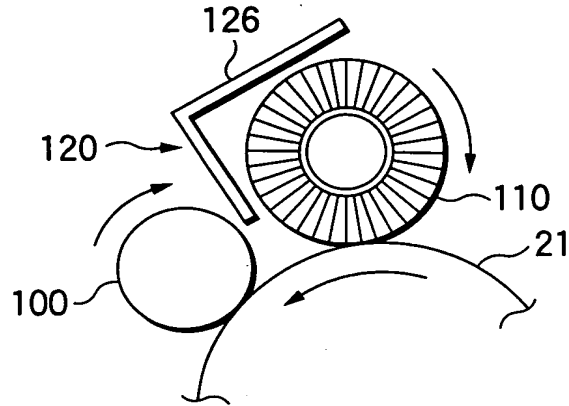


FIG.28(b)


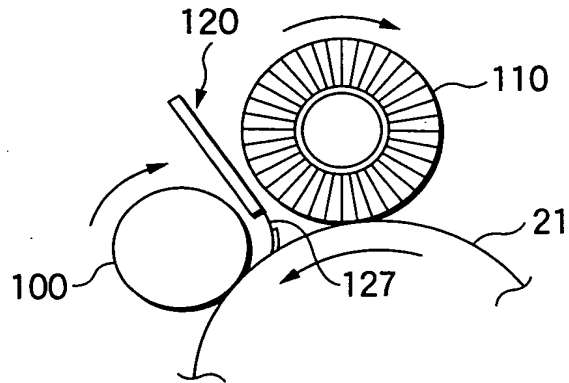


FIG.28(c)

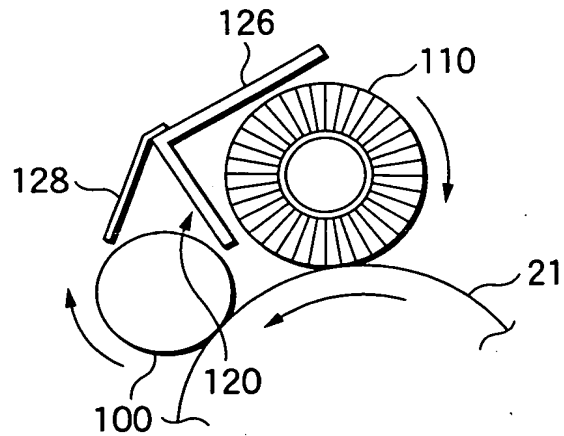

28/32

FIG.29(a)

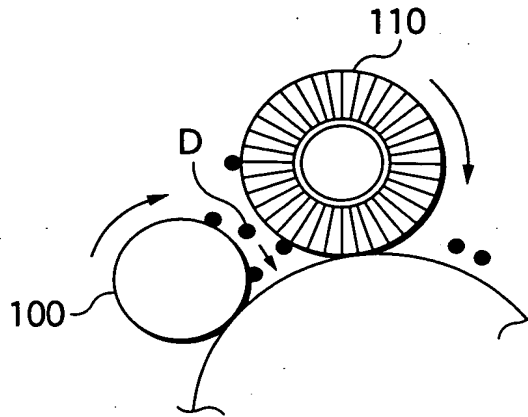


FIG.29(b)



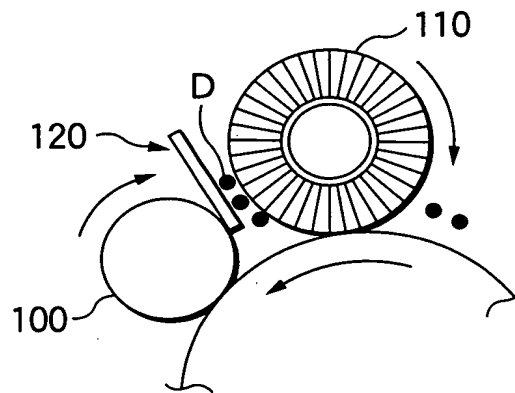


FIG.29(c)

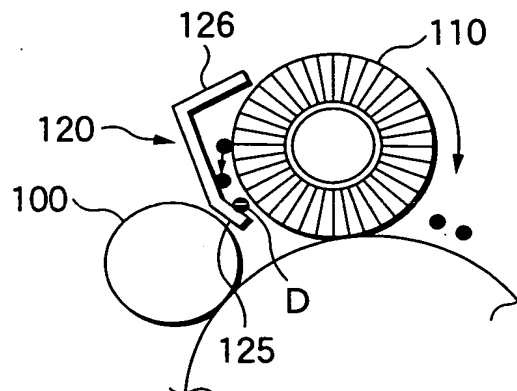

29/32


FIG.30

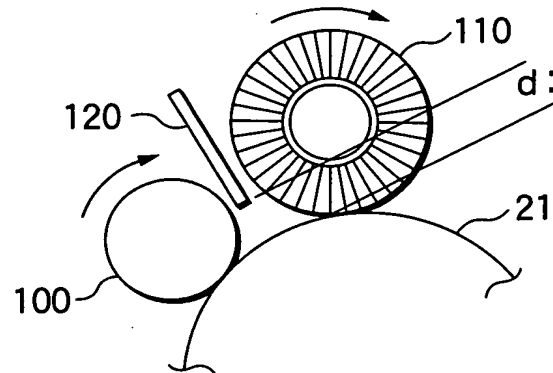

d(mm)	OCCURRENCE OF SPOT
0 (CONTACT)	○
0.5	○
1.0	○
2.0	○
3.0	○
4.0	×


30/32

FIG.31

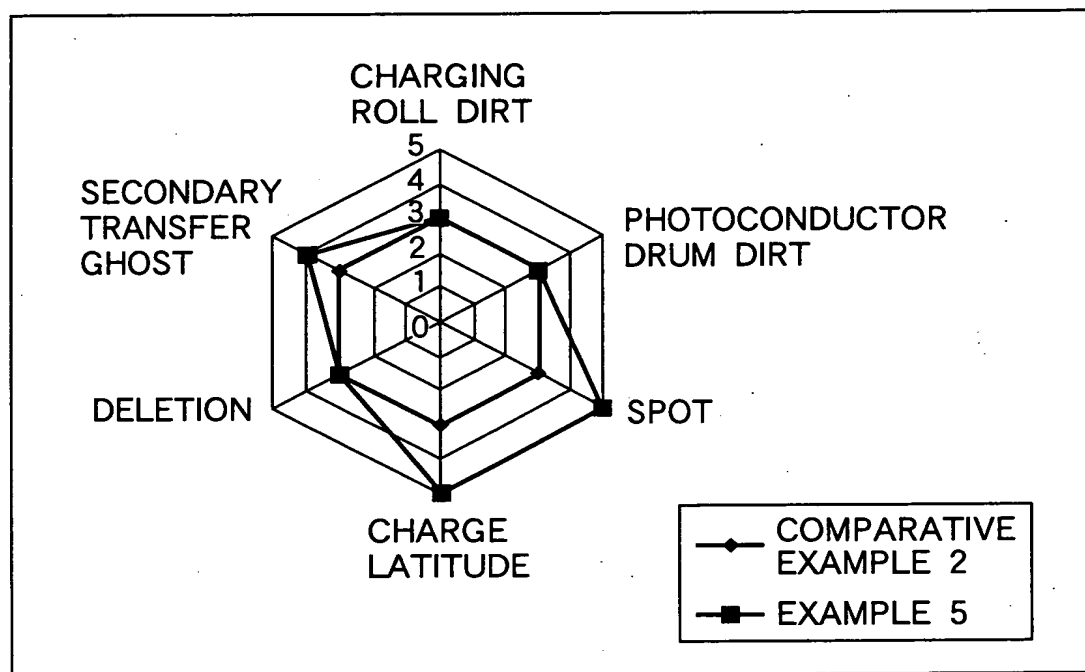

31/32

FIG.32

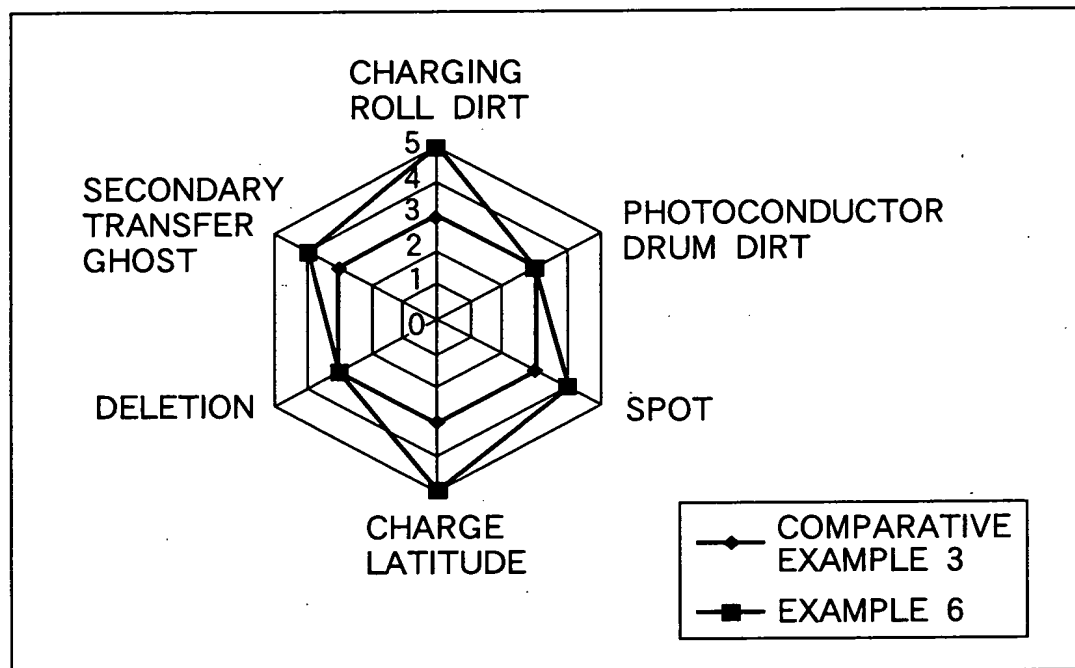

32/32

FIG.33

